



單晶片應用の人機觸控模組

- 快速 **3** 步驟，馬上升級彩色觸控螢幕！
- 獨特專屬UI設計！
- UART / RS232可通！

特色


- ◆ 免費編輯軟體
- ◆ UNICODE 多國語言顯示
- ◆ 支援多態按鈕 / 中英日鍵盤 / 動態曲線
- ◆ 內建運算式 / 判斷式編輯器
- ◆ 觸控流程簡化

規格


- ◆ 支援 8MB / 16MB RAM
- ◆ 內建 128MB / 256MB 快閃記憶體
- ◆ 可選配電阻 / 電容式觸控功能
- ◆ 序列通訊 UART / RS232



UART / RS232



免費編輯軟體

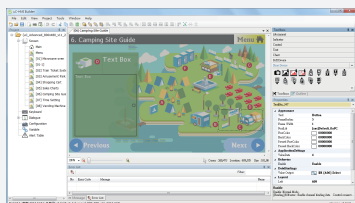


多國語言

歡迎使用 Micro Controller-HMI
Welcome to Use Micro Controller-HMI
ようこそ Micro Controller-HMI へ



動態取線

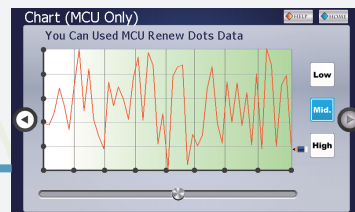

指針式圖示




多樣性圖示按鈕



鍵盤

單晶片應用の人機觸控模組



Size(Diagonal)	3.5"	4.3"	5.6"	
Model Name	UC035QIA14-00R	UC043YIA14-00R	UC056VIA04-00R	
Display Format (H×V)	320×240	480×272	640×480	Pixels
Aspect Ratio	4:3	16:9	4:3	
Brightness w/o TP	300	500	350	cd/m ²
Brightness (TP)	240	400	280	cd/m ²
View Angle	60 / 60 / 50 / 55	70 / 70 / 50 / 70	70 / 70 / 50 / 70	
Power Consumption (+5V)	1.1	1.45	1.9	Watts
Outline Dimensions	88.9 x 65.7 x 15	118.5 x 69 x 14.65	141.5 x 101.6 x 20.65	mm
RAM	8	8	16	MB
Flash Memory	128	128	256	MB
Weight	95	120	265.5	g
Operation Temp. w/o TP	-20~+70	-20~+60	-20~+60	°C
Operation Temp.(TP)	-20~+60	-20~+60	-20~+60	°C
Touch Screen Type	4W RTP	4W RTP	4W RTP	
SD Card Port	Micro SD	Micro SD	Micro SD	
Buzzer(Min)	80	80	80	dBA
Battery	Built-in (CR1220)	Built-in (CR1220)	Built-in (CR1220)	
LifeTime(Min)	10K	20K	20K	Hours
Backlight Type	LED	LED	LED	
Remark	-	-	-	

Size(Diagonal)	7"			10.4"	
Model Name	UC070WIA04-00R	UC070WIA0P-00R	UC070WIA0C-00R	UC104SIA24-00R	
Display Format (H×V)	800×480	800×480	800×480	800×600	Pixels
Aspect Ratio	16:9	16:9	16:9	4:3	
Brightness w/o TP	400	-	-	350	cd/m ²
Brightness (TP)	320	340	340	280	cd/m ²
View Angle	70 / 70 / 50 / 70	70 / 70 / 50 / 70	70 / 70 / 50 / 70	70 / 70 / 50 / 60	
Power Consumption (+5V)	3.15	3.15	3.15	4.4	Watts
Outline Dimensions	177.2 x 101.8 x 20.6	181 x 133.6 x 22.02	188.4 x 121 x 22.15	243.5 x 177.2 x 20.4	mm
RAM	16	16	16	16	MB
Flash Memory	256	256	256	256	MB
Weight	385	487	543	805	g
Operation Temp. w/o TP	-20~+70	-	-	-10~+50	°C
Operation Temp.(TP)	-10~+60	-15~+70	-15~+70	-10~+50	°C
Touch Screen Type	4W RTP	PCAP	PCAP	4W RTP	
SD Card Port	Micro SD	Micro SD	Micro SD	Micro SD	
Buzzer(Min)	80	80	80	80	dBA
Battery	Built-in (CR1220)	Built-in (CR1220)	Built-in (CR1220)	Built-in (CR1220)	
LifeTime(Min)	20K	20K	20K	20K	Hours
Backlight Type	LED	LED	LED	LED	
Remark	-	-	Frame Design	-	

A. Communication : UART(Tx/Rx) Speed Rate 115200 bps (max. 921600 bps) B. RTC : Date,Time,Alarm Clock C. Font : Support Unicode Font
D. Micro SD : For Update Internal Picture Library or Extend Picture Library E. Backlight Control : ON / OFF / Dimming

This technical specification is subject to change without notice.



住址：台中市南區復興路一段85號
電話：886-4-22619577 傳真：886-4-22623978
E-MAIL : fdt@fdt.com.tw http : //www.fdt.com.tw



UC2045C1